


SOLAR SUPER TANK

SST 60

INDIRECTLY FIRED HOT WATER TANK

TANK CAPACITY U.S.gal.	HEAT EXCHANGER HEATING SURFACE sq.ft.	INSULATION THICKNESS inches	OPERATING PRESSURE psl.	MAX. OPER. TEMPERATURE F	SHIPPING WEIGHT lbs.	PRESSURE DROP - COIL ft.water.	COIL LENGTH feet/coil
60	7.85	4.00	150	175	200	3 @ 10 gpm	30

- Made in B.C.
- Uniquely-designed drain and cold water inlet to prevent build up of sediment.
- Designed for quick and simple installation in the field.
- Powder-coated casing for high quality finish and durability.
- To minimize coil wear, internal portions are continuous without any welds.
- 100% 316L Stainless steel tank and heat exchanger.

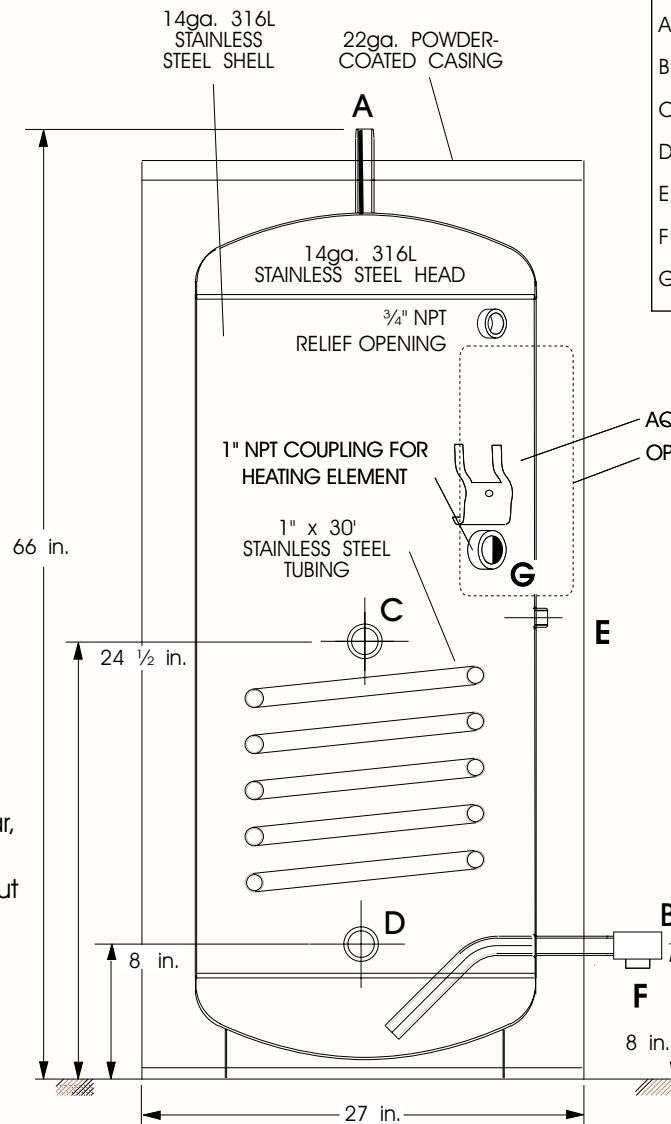

CONNECTIONS

A	Hot water outlet	3/4" NPT nipple
B	Cold water inlet	3/4" NPT coupl.
C	Supply from boiler	1" NPT nipple
D	Return to boiler	1" NPT nipple
E	Temp. gauge (opt.)	1/2" NPT coupl.
F	Drain outlet	3/4" NPT coupl.
G	Element Spud	1" NPT coupl.

- 4" thick fiberglass insulation to ensure energy efficiency.
- Built-in connection for aquastat, temperature gauge, and pressure relief valve.
- Single-coil heat exchanger design, for higher heat transfer rate.

Made Exclusively for Thermomax by
K-TAM Manufacturing Inc.

**10-YEAR
MANUFACTURERS WARRANTY**

THERMOMAX

See "Applications" on www.SolarThermal.com

3181 Kingsley St., Victoria, B.C. Canada V8P 4J5

Tel. (250) 721-4360 Fax. (250) 721-4329